



#12 TEK Screws at 1/4 Points (TYP.)

LSB Stiffener
 -4 total for back to back application
 -2 for single & nested applications

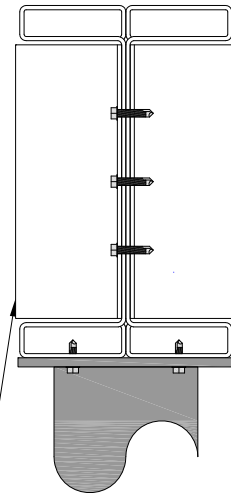

Two 4" Stiffeners may be used as shown with screws spaced 4" O.C. Tube of Stiffener should be at the edge of bearing

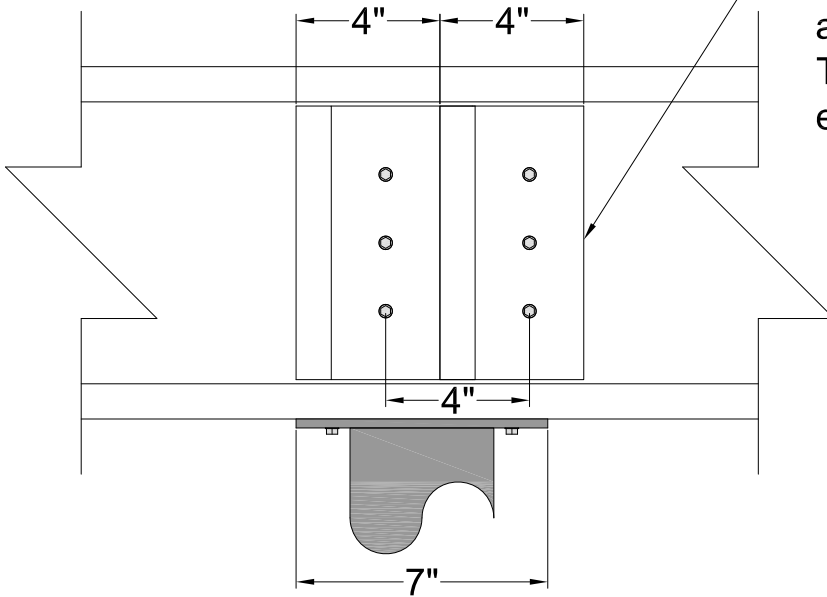

For double stiffener capacities see most up to date version of LSB Selector Software.

Rev. A - Bearing length

Rev. B - Bearing length; Removed full-depth stiffener; Removed capacities; added 4" long stiffener option

- All LiteSteel Beam details are subject to local code provisions
- All components should be selected & installed per the individual component manufacturers' instructions.
- LiteSteel Technologies is not responsible for the performance of components not manufactured by LiteSteel Technologies.



100 Smorgon Way
 Troutville, VA 24175
 Phone : 540-992-1600
 Fax: 540-992-5998
 www.litesteelbeam.com
 sales@litesteelbeam.com

Description:

Interior Double Stiffener Detail

DRAWING NOT TO SCALE

Rev #: B

Rev Date: 02/07/2011

Drawn By: AWN

Checked By: JAM

Dwg #: 09-031

Dwg Date: 09/11/2009

Drawn By: AWN

Checked By: JAM

TEK Screw Table - Steel to LSB

Allowable Loads per Screw (lbs)


Tension			Thickness of Attachment							
			134	118	98	79	59	45	35	
	Design	Minimum	127	112	93	75	56	43	33	
		Gage	10	11	12	14	16	18	20	
Screw		LSB Gage								
	1/4	-134	615				505	395		
		-118	540							
		-098	450							
		-079	365							
		-059	270							
	#12	-134	515			380	295			
		-118	455							
		-098	380							
		-079	305							
		-059	225							
	#10	-134	470			380	295			
		-118	410							
		-098	340							
		-079	275							
		-059	205							

Shear			Thickness of Attachment							
			134	118	98	79	59	45	35	
	Design	Minimum	127	112	93	75	56	43	33	
		Gage	10	11	12	14	16	18	20	
Screw		LSB Gage								
	1/4	-134	860				455	355		
		-118								
		-098								
		-079								
		-059	650							
	#12	-134	665			380	300			
		-118								
		-098								
		-079								
		-059	600							
	#10	-134	465			345	270			
		-118								
		-098								
		-079								
		-059								

NOTES:

1. The maximum load is not to exceed the capacity of the LSB, attachment, or screws.
2. Allowable load values shown are the minimum values based on 2007 AISI NAS for both the connector and the connected material using Buildex TEK screws. Buildex TEK ultimate values can be found in the ITW Buildex 2009 Product Catalog.
3. Values for LSB and hangers 16 ga and thicker are based on members with a minimum yield strength of $F_y = 50\text{ksi}$ and tensile strength of $F_u = 65\text{ksi}$. For hangers or attachments with thickness of 18 ga and thinner values are based on members with a minimum yield strength of $F_y = 33\text{ksi}$ and tensile strength $F_u = 45\text{ksi}$.
4. A minimum of three threads must penetrate each member.

- All LiteSteel Beam details are subject to local code provisions
- All components should be selected & installed per the individual component manufacturers' instructions.
- LiteSteel Technologies is not responsible for the performance of components not manufactured by LiteSteel Technologies.

	100 Smorgon Way Troutville, VA 24175 Phone : 540-992-1600 Fax: 540-992-5998 www.litesteelbeam.com sales@litesteelbeam.com	Description: Screw Chart - Steel to LSB	Rev #: _____ - Rev Date: _____ - Drawn By: _____ - Checked By: _____ -	Dwg #: ATTCH.-1 Dwg Date: 09/16/2009 Drawn By: AWN Checked By: JAM
	DRAWING NOT TO SCALE			